

Translation of the original operating instructions

Table of contents

1. Introduction .....	8
2. Product description (Fig. 1-3).....	8
3. Scope of delivery (Fig. 1-3).....	9
4. Proper use .....	9
5. Safety instructions.....	10
6. Technical data .....	13
7. Unpacking .....	13
8. Before commissioning.....	14
9. Operation.....	14
10. Cleaning and maintenance .....	16
11. Storage .....	16
12. Repair & ordering spare parts .....	17
13. Troubleshooting.....	17
14. Warranty Details .....	18
15. Repair and Refurbished Goods or Parts Notice .....	19
16. Exploded view.....	20

ALDI GUARANTEES THAT OUR EXCLUSIVE BRAND PRODUCTS ARE DEVELOPED TO OUR STRINGENT QUALITY SPECIFICATIONS. IF YOU ARE NOT ENTIRELY SATISFIED WITH THIS PRODUCT, PLEASE RETURN IT TO THE NEAREST ALDI STORE WITHIN 60 DAYS FROM THE DATE OF PURCHASE, FOR A FULL REFUND OR REPLACEMENT, OR TAKE ADVANTAGE OF OUR AFTER SALES SUPPORT BY CALLING THE SUPPLIER'S CUSTOMER SERVICE HOTLINE.

**AU**  
Made in China  
FERREX® is a registered trademark of ALDI Stores  
DISTRIBUTED BY:  
ALDI STORES  
1 Sargents Road  
Minchinbury NSW 2770  
www.aldi.com.au

After Sales Support

 **AU** 1300 855 831

support@scheppach.com.au

Model:  
F-BWL12

W<sup>2</sup>

837350



07/2024

5

YEAR WARRANTY

FERREX®  
CORDLESS BATTERY WORK LIGHT F-BWL12



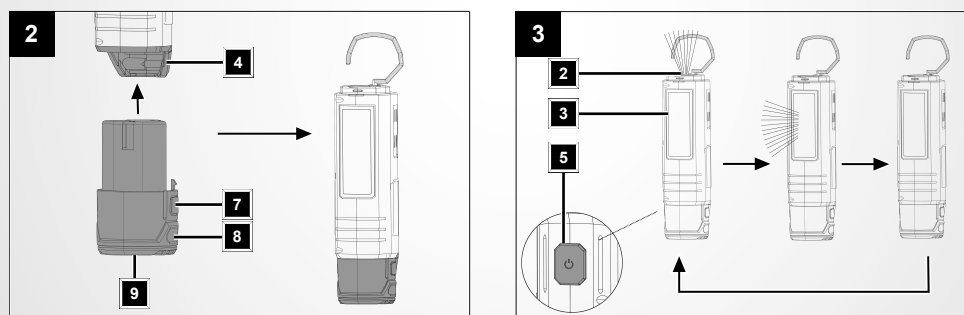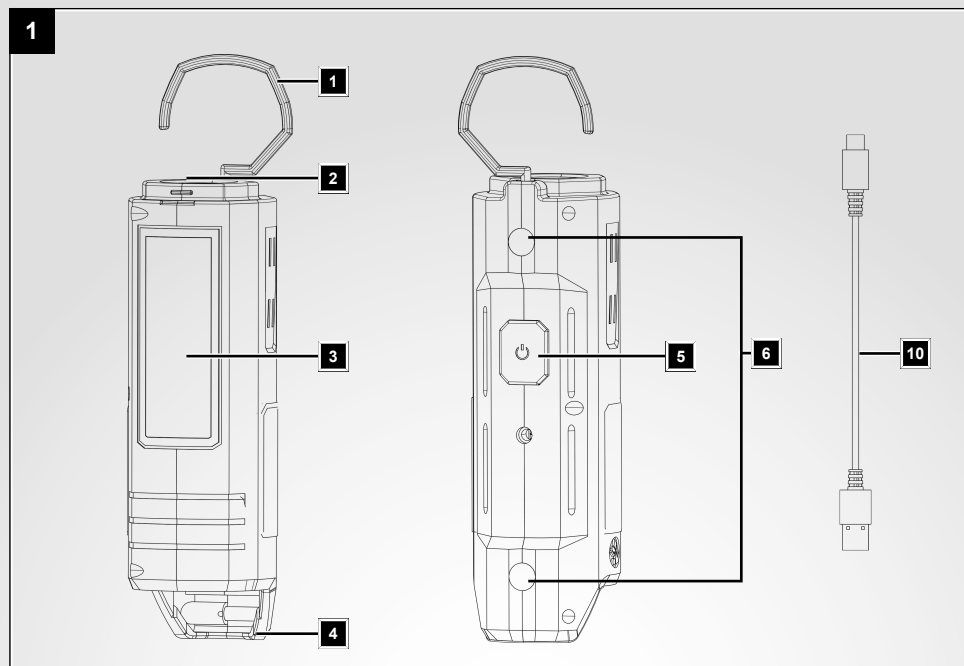















## Scope of delivery

- 1 x Battery
- 1 x USB charging cable
- 1 x Cordless Battery Work Light
- 1 x Operating manual
- 1 x Warranty card

## Explanation of the symbols on the product

Symbols are used in this manual to draw your attention to potential hazards. The safety symbols and the accompanying explanations must be fully understood. The warnings themselves will not rectify a hazard and cannot replace proper accident prevention measures.

	Attention! Failure to observe the safety signs and warning information affixed to the product and failure to observe the safety and operating manual can result in serious injury or even death.		Protection class III (protection by extra-low voltage)
	Before commissioning, read and observe the operating manual and safety instructions!		The product is only suitable for indoor operation.
	Warning - Hot surfaces!		Regulatory Compliance Mark
	Do not stare at the operating light source.		Warranty class
	Do not throw the product into a fire.		Dispose of batteries according to local regulations.
	Do not throw the product into water.		Lithium-ion battery
	Do not expose the product to strong sunlight for a long time and do not place it on radiators (-20-50°C).		5 year warranty

# 1. Introduction

## **Manufacturer:**

Scheppach GmbH  
Günzburger Straße 69  
D-89335 Ichenhausen

## **Dear Customer**

We hope your new product brings you much enjoyment and success.

## **Note:**

In accordance with the applicable product liability laws, the manufacturer of this product assumes no liability for damage to the product or caused by the product arising from:

- Improper handling
- Non-compliance with the operating manual
- Repairs carried out by third parties, unauthorised specialists
- Installing and replacing non-original spare parts
- Improper use
- Failures of the electrical system in the event of the electrical regulations not being observed.

## **Note:**

The operating manual is part of this product.

It includes important instructions for the safe, proper and economic operation of the product, for avoiding danger, for minimising repair costs and downtimes and for increasing the reliability and extending the service life of the product. In addition to the safety instructions in this operating manual, you must also observe the regulations applicable to the operation of the product in your country.

Familiarise yourself with all operating and safety instructions before using the product. Only operate the product as described and for the specified areas of application. Keep the operating manual in a good place and hand over all documents when passing the product on to third parties.

# 2. Product description (Fig. 1-3)

1. Hook
2. LED front light
3. LED rod light
4. Battery mount

- 5. On/off switch
- 6. Magnetic dots
- 7. Release button
- 8. Battery
- 9. Charging light
- 10. USB charging cable

### 3. Scope of delivery (Fig. 1-3)

Item	Quantity	Designation
8.	1 x	Battery
10.	1 x	USB charging cable
	1 x	Cordless Battery Work Light
	1 x	Operating manual
	1 x	Warranty card

### 4. Proper use

The product is intended for illuminating dry, poorly lit indoor areas, such as garages, cellars or attics.

The product is not suitable for permanent room lighting in the household.

The product may only be used in the intended manner. Any use beyond this is improper. The user/operator, not the manufacturer, is responsible for damages or injuries of any type resulting from this.

An element of the intended use is also the observance of the safety instructions, as well as the assembly instructions and operating information in the operating manual.

Persons who operate and maintain the product must be familiar with the manual and must be informed about potential dangers.




The liability of the manufacturer and resulting damages are excluded in the event of modifications of the product.

The product may only be operated with original parts and original accessories from the manufacturer.


The safety, operating and maintenance specifications of the manufacturer, as well as the dimensions specified in the technical data, must be observed.

Please note that our products were not designed with the intention of use for commercial or industrial purposes. We assume no guarantee if the product is used in commercial or industrial applications, or for equivalent work.

## Explanation of the signal words in the operating manual

 <b>DANGER</b>
<b>Signal word to indicate an imminently hazardous situation which, if not avoided, will result in death or serious injury.</b>
 <b>WARNING</b>
<b>Signal word to indicate a potentially hazardous situation which, if not avoided, could result in death or serious injury.</b>
 <b>CAUTION</b>
<b>Signal word to indicate a potentially hazardous situation which, if not avoided, could result in minor or moderate injury.</b>
<b>ATTENTION</b>
<b>Signal word to indicate a potentially hazardous situation which, if not avoided, could result in product or property damage.</b>

## 5. Safety instructions

 <b>WARNING</b>
<b>Read all safety warnings, instructions, illustrations and specifications provided with this power tool.</b>
Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

### **Save all warnings and instructions for future reference.**

The term “power tool” in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

### **Electrical safety**

- **Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.

## Using and handling the cordless tool

- a) **Only charge the batteries with battery chargers recommended by the manufacturer.** A battery charger that is suitable for a particular type of battery poses a fire hazard when used with other batteries.
- b) **Only use the batteries in power tools that are designed for them.** The use of other batteries can lead to injuries and a risk of fire.
- c) **Keep the unused battery away from paper clips, coins, keys, nails, screws or other small metal objects that could cause a short-circuit between the contacts.** A short-circuit between the contacts of the battery could result in burns or fires.
- d) **Liquid may leak from the battery if used incorrectly. Avoid contact with it. In case of accidental contact, rinse with water. If the liquid gets into your eyes, seek additional medical attention.** Leaking battery fluid may cause skin irritation or burns.
- e) **Do not use a damaged or modified battery.** Damaged or modified batteries can behave unpredictably and cause fire, explosion or injury.
- f) **Do not expose a battery to fire or excessive temperatures.** Fire or temperatures above 130°C may cause an explosion.
- g) **Follow all charging instructions and never charge the battery or rechargeable tool outside the temperature range specified in the operating manual.** Incorrect charging or charging outside the approved temperature range can destroy the battery and increase the risk of fire.

## Service

- a) **Only have your power tool repaired by qualified specialists and only with original spare parts.** This will ensure that the safety of the power tool is maintained.

## Safety instructions for battery-powered lights

### ATTENTION

Make sure that the ambient temperature does not exceed 50°C and does not fall below -20°C during work.

- Do not work with the product in an explosive environment.
- Do not cover the product during operation. The product heats up during operation and can cause burns if heat builds up.
- Do not look directly into the light beam with unprotected eyes.

- The light beam must never be directed at people or animals.
- Children are not permitted to use the product. Children should be supervised in order to ensure that they do not play with the product.
- Children could unintentionally blind themselves or others.
- Do not use the product in road traffic. The product is not permitted for road traffic lighting.
- Burns are possible. Never touch the hot surface of the light source.
- Keep the product away from magnetically sensitive products and magnetic data carriers. The magnets may cause irreversible data loss.
- **Do not open the battery and avoid mechanical damage to the rechargeable battery.** There is a risk of short-circuiting and vapours may escape that irritate the respiratory tract. Make sure you get fresh air and seek additional medical help.

### Residual risks

**The product has been built according to state-of-the-art and the recognised technical safety rules. However, individual residual risks can arise during operation.**



- Residual risks can be minimised if the "Safety Instructions" and the "Intended Use" together with the operating manual as a whole are observed.
- Use the product in the way that is recommended in this operating manual. This is how to ensure that your product provides optimum performance.
- Furthermore, despite all precautions having been met, some non-obvious residual risks may still remain.

### **WARNING**

This power tool generates an electromagnetic field during operation. This field can impair active or passive medical implants under certain circumstances. In order to prevent the risk of serious or deadly injuries, we recommend that persons with medical implants consult with their physician and the manufacturer of the medical implant prior to operating the power tool.



## 6. Technical data

Rated voltage	12 V 
Power consumption	3 W
Luminous flux	
Front light	360 lm
Rod light	126 lm
Light intensity	
Front light	199000 lx
Rod light	69700 lx
Lighting duration	
Front light	approx. 8 h
Rod light	approx. 5 h
Colour temperature	>5500 K
Protection class	III
Dimension (Length x width x height)	160*48*55 mm
Weight	0.159 kg
<b>Battery (Li-Ion)</b>	
Number of battery cells	3
Rated voltage	max. 12 V 
Capacity	1.3 Ah
Power	15.6 Wh
Charging process temperature	50 °C
Charging time	3-4.5 h

## 7. Unpacking

### **WARNING**

**The product and the packaging material are not children's toys!  
Do not let children play with plastic bags, films or small parts!  
There is a danger of choking or suffocating!**

- Open the packaging and carefully remove the product.

- Remove the packaging material, as well as the packaging and transport safety devices (if present).
- Check whether the scope of delivery is complete.
- Check the product and accessory parts for transport damage. Immediately report any damage to the transport company that delivered the Product. Later claims will not be recognised.
- If possible, keep the packaging until the expiry of the warranty period.
- Familiarise yourself with the product by means of the operating manual before using for the first time.
- With accessories as well as wearing parts and replacement parts use only original parts. Spare parts can be obtained from your specialist dealer.
- When ordering please provide our article number as well as type and year of manufacture for the product.

## 8. Before commissioning

### 8.1. Inserting/removing the battery (8) (Fig. 2)

#### Inserting the battery

1. Push the battery (8) into the battery holder (4) of the product. The battery (8) clicks into place audibly.

#### Removing the battery

1. Press the battery release button (7) and pull the battery (8) out of the product's battery mount (4).

## 9. Operation

### 9.1. Switching the product on/off (Fig. 3)

#### CAUTION

Do not look directly into the LED work lamp or the light source.

#### **Note:**

The LED front light (2) can also be used as a torch for spot lighting.

1. Press the on/off switch (5) to switch the LED front light (2) on.
2. Press the on/off switch (5) again to switch the LED rod light (3) on.
3. To switch off the product, press the on/off switch (5) again.

## 9.2. Fastening the work light (Fig. 1)

### **Note:**

Check permanent durability of the product fastening. There is a risk of damage from the product falling.

1. With the fold-out hook (1), the rechargeable work light can be attached to an object and used as a pendant light.
2. You can use the magnetic dots (6) to attach the cordless work light to a flat, ferromagnetic surface.

## 9.3. Charging the battery (8) (Fig. 2)

### **WARNING**

#### **Observe the following information to reduce hazards:**

- Never leave batteries to charge unsupervised!
- Remove rechargeable batteries from the USB charging cable after charging.
- Do not over-charge batteries! Observe the maximum charging times. These charging times only apply to discharged batteries. Inserting a charged or partially charged battery multiple times leads to overloading and cell damage. Do not leave batteries charging for longer than required.

Charge the battery (8) at an ambient temperature of 4 °C to 45°C.

\* = may not be included in the scope of delivery!


1. Connect the USB charging cable (10) to the battery (8).
2. Connect the USB charging cable (10) to a mains plug\* and plug the mains plug\* into a socket.
3. The battery (8) comes with a charging light (9).
  - When the battery is charging, the red light will be on.
  - Red light goes out when the battery is fully charged.
4. After charging, remove the mains plug\* from the socket and disconnect the USB charging cable (10) from the battery (8).
5. Wait at least 15 min until a new charging process. To do this, pull the mains plug\* out of the socket.

#### 9.4. Depleted batteries

- A significantly shortened operating time despite charging indicates that the battery has been used up and needs to be replaced. Only use original replacement batteries.
- In any case, observe the applicable safety instructions as well as regulations and instructions on environmental protection (see “Disposal and recycling”).

## 10. Cleaning and maintenance

### 10.1. Cleaning

 <b>WARNING</b>
<b>Danger of injury</b> Switch off the product and remove the battery before any cleaning work.

1. Wipe any dirt off the lens with a dry cloth. Be careful to avoid scratching the LED lamp as this can severely reduce the light intensity.
2. Do not use any cleaning products or solvents; they could attack the plastic parts of the product. Make sure that no water can penetrate the product interior.

### 10.2. Maintenance

The product is maintenance-free.

- The light source of this work lamp is not replaceable; when the light source has reached its end of life, replace the entire work lamp.

## 11. Storage

### Preparation for storage

1. Remove the battery.
2. Clean and check the product for damage.

Store the product and its accessories in a dark, dry and frost-free place that is inaccessible to children.

The optimum storage temperature is between 5°C and 30 °C.

Store the product in its original packaging.

Cover the product to protect it from dust or moisture. Store the operating manual with the product.

## 12. Repair & ordering spare parts

After repairs or maintenance, make sure that all safety-related parts are installed and are in perfect condition. All parts which may cause injury must be kept where they are inaccessible to children or others.

### ATTENTION

No liability is accepted for damage caused by improper repairs or by not using original spare parts.

Such work should be performed by a customer service centre or an authorised specialists. The same applies to accessory parts.

### 12.1. Ordering spare parts

Please provide the following information when ordering spare parts:

- Model designation
- Item number
- Type plate data

## 13. Troubleshooting

Fault	Possible cause	Remedy
The LED work light is not lit up.	The battery power is too weak.	Charge the battery.
	The battery is not properly inserted.	Push the battery into the battery mount. The battery clicks into place audibly.
	The contacts on the product or battery are dirty.	Remove any existing dirt.
	LED is defective.	Please contact our service department.

# 14. Warranty Details



**FERREX®**

**CORDLESS BATTERY WORK LIGHT**

## Warranty Details

---

**REGISTER YOUR PURCHASE AT [www.aldi.com.au/en/about-aldi/product-registration/](http://www.aldi.com.au/en/about-aldi/product-registration/)  
TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION**

---

The product is guaranteed to be free from defects in workmanship and parts for a period of 60 months (dependant on product) from the date of purchase. Defects that occur within this warranty period, under normal use and care, will be repaired, replaced or refunded at our discretion. The benefits conferred by this warranty are in addition to all rights and remedies in respect of the product that the consumer has under the Competition and Consumer Act 2010 and similar state and territory laws.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

---

**AFTER SALES SUPPORT**

1300 855 831

[support@scheppach.com.au](mailto:support@scheppach.com.au)



## 15. Repair and Refurbished Goods or Parts Notice



# FERREX®

**CORDLESS BATTERY WORK LIGHT**

## Repair and Refurbished Goods or Parts Notice

**REGISTER YOUR PURCHASE AT [www.aldi.com.au/en/about-aldi/product-registration/](http://www.aldi.com.au/en/about-aldi/product-registration/)  
TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION**

Unfortunately, from time to time, faulty products are manufactured which need to be returned to the Supplier for repair.

Please be aware that if your product is capable of retaining user-generated data (such as files stored on a computer hard drive, telephone numbers stored on a mobile telephone, songs stored on a portable media player, games saved on a games console or files stored on a USB memory stick) during the process of repair, some or all of your stored data may be lost.

**We recommend you save this data elsewhere prior to sending the product for repair.**

You should also be aware that rather than repairing goods, we may replace them with refurbished goods of the same type or use refurbished parts in the repair process.

**Please be assured though, refurbished parts or replacements are only used where they meet ALDI's stringent quality specifications.**

If at any time you feel your repair is being handled unsatisfactorily, you may escalate your complaint. Please telephone us on 1300 855 831 or write to us at:

**RossMac Pty. Ltd.**  
**Unit 6, 4 Ovata Drive, Tullamarine, Victoria, 3043, Australia**  
**1300 855 831**  
**[support@scheppach.com.au](mailto:support@scheppach.com.au)**


**Opening hours:**  
**Monday - Friday 8:00am-6:00pm**

**AFTER SALES SUPPORT**

**1300 855 831**

**[support@scheppach.com.au](mailto:support@scheppach.com.au)**



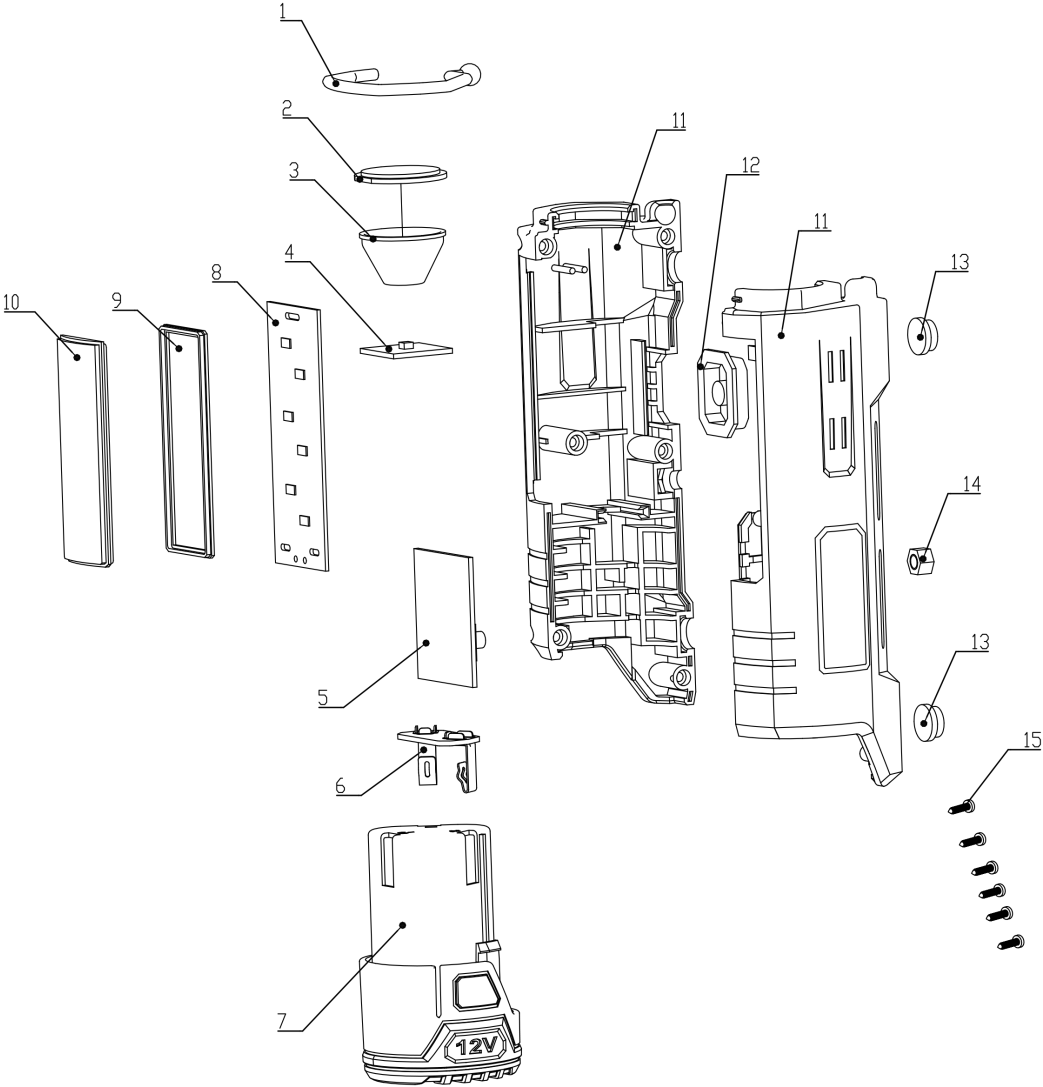



---

## Notes

---

# Notes