FERREX[®]

ALDI GUARANTEES THAT OUR EXCLUSIVE BRAND PRODUCTS ARE DEVELOPED TO OUR STRINGENT QUALITY SPECIFICATIONS. IF YOU ARE NOT ENTIRELY SATISFIED WITH THIS PRODUCT, PLEASE RETURN IT TO THE NEAREST ALDI STORE WITHIN 60 DAYS FROM THE DATE OF PURCHASE, FOR A FULL REFUND OR REPLACEMENT, OR TAKE ADVANTAGE OF OUR AFTER SALES SUPPORT BY CALLING THE SUPPLIER'S CUSTOMER SERVICE HOTLINE.

AU

۲

Made in China Ferrex© is a registered trademark of ALDI Stores DISTRIBUTED BY: ALDI STORES **1** Sargents Road Minchinbury NSW 2770 www.aldi.com.au

After sales support	W2	
열 ④ 1300 855 831 □ support@scheppach.com.au	845559	5
Model: F-WDV35 B1	05/2025	YEAR WARRANTY

WET AND DRY VACUUM CLEANER F-WDV35 B1



Scope	of delivery	(Fig. 2)
-------	-------------	----------

1x Base frame 4 x Castors

- 1x Vacuum hose
- 1x Telescopic tube
- 1x Floor nozzle
- 1x Joint nozzle
- 1x Paper filter bag
- 1x Foam filter
- 1x Filter cartridge
- 1x Wet / dry vacuum cleaner
- 1x Operating manual
- 1x Warranty card

Table of contents

	Introduction	9
•	Product description (Fig. 1-13)	9
	Scope of delivery (Fig. 2)	10
	Proper use	11
	Safety instructions	12
	Technical data	14
	Unpacking	15
	Assembly	15
	Operation	19
)	Working instructions	20
۱.	Electrical connection	22
2.	Cleaning and maintenance	24
3.	Storage and transport	26
4	Repair & ordering spare parts	27
5	Troubleshooting	28
5	Warranty Details	30
,	Repair and Refurbished Goods or Parts Notice	31
3	Exploded view	32



Table of contents

1.	Introduction	9
2.	Product description (Fig. 1-13)	9
3.	Scope of delivery (Fig. 2)	10
4.	Proper use	11
5.	Safety instructions	12
6.	Technical data	14
7.	Unpacking	15
8.	Assembly	15
9.	Operation	19
10	Working instructions	20
11.	Electrical connection	22
12.	Cleaning and maintenance	24
13.	Storage and transport	26
14.	Repair & ordering spare parts	27
15.	Troubleshooting	28
16.	Warranty Details	30
17.	Repair and Refurbished Goods or Parts Notice	31
18	. Exploded view	32

Explanation of the symbols on the product

Symbols are used in this manual to draw your attention to potential hazards. The safety symbols and the accompanying explanations must be fully understood. The warnings themselves will not rectify a hazard and cannot replace proper accident prevention measures.

	Before commissioning, read and observe the operating manual and safety instructions!
Made in China	Regulatory Compliance Mark
	Warranty class
5 YEAR WARRANTY	5 years warranty

1. Introduction

Manufacturer:

Scheppach GmbH

Günzburger Straße 69

D-89335 Ichenhausen

Dear Customer

We hope your new product brings you much enjoyment and success.

Note:

In accordance with the applicable product liability laws, the manufacturer of this product assumes no liability for damage to the product or caused by the product arising from:

- Improper handling
- Non-compliance with the operating manual
- Repairs carried out by third parties, unauthorised specialists
- Installing and replacing non-original spare parts
- Improper use
- Failures of the electrical system in the event of the electrical regulations and VDE provisions 0100, DIN 57113 / VDE0113 not being observed.

Note:

The operating manual is part of this product.

It includes important instructions for the safe, proper and economic operation of the product, for avoiding danger, for minimising repair costs and downtimes and for increasing the reliability and extending the service life of the product. In addition to the safety instructions in this operating manual, you must also observe the regulations applicable to the operation of the product in your country.

Familiarise yourself with all operating and safety instructions before using the product. Only operate the product as described and for the specified areas of application. Keep the operating manual in a good place and hand over all documents when passing the product on to third parties.

2. Product description (Fig. 1-13)

- 1. Carrying handle
- 2. Container cover
- 2a. Holder
- 3. Container

3a.	Locking mechanisms
4.	Base frame
4a.	Holders
4b.	Mounting holes
5.	Castors
6.	Drain cover
7.	Suction connection
7a.	Fitting port
8.	Product socket outlet
9.	On/off switch
10.	Blast connection
11.	Filter cage
11a.	Safety float valve
12.	Vacuum hose
12a.	Hose coupling
13.	Handle
13a.	Slider
14.	Telescopic tube
14a.	Release button
15.	Floor nozzle
16.	Joint nozzle
17.	Paper filter bag
17a.	Sealing ring
18.	Foamfilter
19.	Filter cartridge
	-

3. Scope of delivery (Fig. 2)

Item	Quantity	Designation
4.	1 x	Base frame
5.	4 x	Castors
12.	1 x	Vacuum hose
14.	1 x	Telescopic tube
15.	1 x	Floor nozzle
16.	1 x	Joint nozzle
17.	1 x	Paper filter bag
18.	1 x	Foam filter
19.	1 x	Filter cartridge
	1 x	Wet / dry vacuum cleaner
	1 x	Operating manual
	1 x	Warranty card

4. Proper use

The wet and dry vacuum cleaner is suitable for wet and dry vacuuming using the appropriate filter. The product is not intended for vacuuming flammable, explosive or harmful substances.

The product may only be used in the intended manner. Any use beyond this is improper. The user, not the manufacturer, is responsible for damages or injuries of any type resulting from this.

An element of the intended use is also the observance of the safety instructions, as well as the assembly instructions and operating information in the operating manual.

Persons who operate and maintain the product must be familiar with the manual and must be informed about potential dangers.

The liability of the manufacturer and resulting damages are excluded in the event of modifications of the product.

The product may only be operated with original parts and original accessories from the manufacturer.

The safety, operating and maintenance specifications of the manufacturer, as well as the dimensions specified in the technical data, must be observed.

Please note that our products were not designed with the intention of use for commercial or industrial purposes. We assume no guarantee if the product is used in commercial or industrial applications, or for equivalent work.

Explanation of the signal words in the operating manual

A DANGER

Signal word to indicate an imminently hazardous situation which, if not avoided, will result in death or serious injury.

⚠ WARNING

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in death or serious injury.

▲ CAUTION

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in minor or moderate injury.

ATTENTION

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in product or property damage.

5. Safety instructions

Keep all safety information and instructions for future reference!

⚠ WARNING

Read all safety warnings, instructions, illustrations and specifications provided with this power tool.

Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

5.1. General safety instructions

• This product can be used by children from 8 years of age as well as by persons with reduced physical, sensory or mental capabilities or with a lack of experience or knowledge, if they are supervised or if they have been trained in the safe use of the product and understand the resultant hazards. Children may not play with the Product. Cleaning and user maintenance must not be carried out by children unsupervised.

ATTENTION

The following safety measures for protection against electric shock, and the risk of injury and fire must be observed when using electric tools:

5.2. It will help you avoid accidents and injuries

- Never leave a product ready for operation unattended at the workplace.
- People and animals must not be suctioned with the product.

- Never point the product or nozzles at yourself or others, especially your eyes and ears, during operation. There is a danger of injury.
- Do not suck up any hot, glowing, flammable, explosive or hazardous substances. These include hot ash, petrol, solvents, acids or alkalis. There is a risk of fire and injury.
- Check the product and accessories regularly for damage. Do not use a damaged product or accessories.

5.3. To avoid accidents and injuries due to electric shock

- Switch off the product:
 - when the product is not in use, is being transported or is unattended.
 - when checking the device, it is raining or when removing blockages.
 - when cleaning or performing maintenance or changing accessories.
 - after contact with foreign objects or in the event of abnormal vibrations.
- Do not immerse the product in water and do not operate it in a damp environment.
- Never immerse the product in water or other liquids for cleaning.
- Do not touch the product with damp or wet hands!

5.4. This way, product damage and any resulting personal injury can be avoided

- Ensure that the product is correctly assembled and that the filters are in the correct position.
- Do not work without a filter. The product may become damaged.
- Only use original spare parts and accessories (see "Spare parts/accessories") supplied and recommended by our Service Centre. Using third-party parts leads to a loss of guarantee claims.
- Only have repairs carried out by authorised service centres.
- Follow the instructions for cleaning and maintaining the product.
- Store the product in a dry place and out of reach of children.

Residual risks

The power tool is state-of-the-art and has been built according to the recognised technical safety regulations. However, individual residual risks can arise during operation.

• Health hazard due to electrical power, with the use of improper electrical connection cables.

- Furthermore, despite all precautions having been met, some non-obvious residual risks may still remain.
- Residual risks can be minimised if the "Safety Instructions" and the "Intended Use" together with the operating manual as a whole are observed.
- Prevent the product being unintentionally started up.
- Keep your hands away from the working area when the product is in operation.
- Unintentional starting up of the product.
- Comply with the stipulated maintenance and safety instructions in the operating manual.

\land WARNING

This power tool generates an electromagnetic field during operation. This field can impair active or passive medical implants under certain circumstances. In order to prevent the risk of serious or deadly injuries, we recommend that persons with medical implants consult with their physician and the manufacturer of the medical implant prior to operating the power tool.

6. Technical data

Rated voltage	220-240 V~/
	50/60 Hz
Power	1200 W
Protection class	I
Protection category	IPX4
Length of mains connection cable	3.0 m
Container volume	approx. 35 l
Suction capability	18 kPa
Max. air flow	30 l/s
Power socket	1000 W
Total power	2200 W
Weight	approx. 5.7 kg

Subject to technical changes!

7. Unpacking

⚠ WARNING

The product and the packaging material are not children's toys! Do not let children play with plastic bags, films or small parts! There is a danger of choking or suffocating!

- Open the packaging and carefully remove the product.
- Remove the packaging material, as well as the packaging and transport safety devices (if present).
- Check whether the scope of delivery is complete.
- Check the product and accessory parts for transport damage. Immediately report any damage to the transport company that delivered the Product. Later claims will not be recognised.
- If possible, keep the packaging until the expiry of the warranty period.
- Familiarise yourself with the product by means of the operating manual before using for the first time.
- With accessories as well as wearing parts and replacement parts use only original parts. Spare parts can be obtained from your specialist dealer.
- When ordering please provide our article number as well as type and year of manufacture for the product.

8. Assembly

⚠ WARNING

Danger of injury!

Only insert the mains plug into the socket when the product is ready for use.

• Place the product on a level, even surface.

8.1. Attaching and removing the container cover (2) (Fig. 2, 3) Removing the container cover:

- 1. Before removing the container cover (2), remove all nozzles (15/16) from the holders (2a).
- 2. Loosen the latches (3a).

3. Lift the container cover (2) from the container (3).

Attaching the container cover:

- 1. Place the container cover (2) on the container (3).
- 2. Fasten the container cover (2) with the latches (3a). Ensure that the latches (3a) latch into the recesses in the container cover (2).

8.2. Fitting the container (3) to the base frame (4) (Fig. 4)

- 1. Put the container (3) on the base frame (4).
- 2. Gently push the container (3) onto the base frame (4).
- 3. Ensure that the locking mechanism of the base frame (4) engages on the container (3).

8.3. Fitting the rollers (5) (Fig. 4)

- 1. Remove the container cover (2) as described in Attaching and removing the container cover (2) (Fig. 2, 3).
- 2. Set the container down (3) on a solid surface with the underside facing upwards.
- 3. Place the rollers (5) into the assembly holes (4b) provided on the base frame (4).
- 4. Gently press the rollers (5) into the assembly holes (4b).
- 5. Flip the container (3) and place it on the rollers (5).

8.4. Filter and filter bag (Fig. 2)

The product has the following filter and filter bag included in the scope of delivery:

Paper filter bag (17)

• Dry vacuuming

Foam filter (18)

• Wet vacuuming

Filter cartridge (19)

• Dry vacuuming of fine dust

Note:

- 1. In order to fit/remove the filter and filter bag, remove the container cover (2) as described under Attaching and removing the container cover (2) (Fig. 2, 3).
- 2. Always set down the container cover (2) with the top facing downwards.
- 3. After you have assembled/removed the desired filter and filter bag, reattach the container cover (2) to the container (3).

8.4.1. Assembling/removing the paper filter bag (17) (Fig. 5)

Removing:

1. Remove the paper filter bag (17) from the bar (7a) on the suction connection (7).

Assembling:

- 1. Attach the paper filter bag (17) to the bar (7a) on the suction connection (7) inside the container (3).
- 2. Check that the paper filter bag (17) is installed correctly and the sealing ring (17a) fully envelopes the bar on the suction connection (7).

8.4.2. Assembling/removing the foam filter (18) (Fig. 6)

Removing:

1. Remove the foam filter (18) from the filter cage (11).

Assembling:

- 1. Remove the foam filter (18) over the filter cage (11).
- 2. Check that the foam filter (18) is installed correctly and fully envelopes the filter cage (11).

8.4.3. Assembling/removing the filter cartridge (19) (Fig. 7)

Removing:

 Turn the filter cartridge (19) anti-clockwise and remove it from the filter cage (11). Ensure that the lugs in the filter cage (11) and the recesses in the filter cartridge (19) are correctly aligned.

Assembling:

- 1. Push the filter cartridge (19) fully onto the filter cage (11).
- 2. Turn the filter cartridge (19) clockwise until it is fully engaged in the container cover (2).

Ensure that the lugs in the filter cage (11) and the recesses in the filter cartridge (19) are correctly aligned.

3. Check that the filter cartridge (19) is installed correctly and fully envelopes the filter cage (11).

8.5. Connecting the suction hose (12)

8.5.1. Suction function (Fig. 8)

- 1. Push the hose coupling (12a) fully into the suction connection (7).
- 2. Turn the hose coupling (12a) clockwise until it fully engages.
- 3. Check that the suction hose (12) is installed correctly by gently pulling on the hose coupling (12a).

8.5.2. Blast function (Fig. 9)

- 1. Push the hose coupling (12a) fully into the blowing connection (10).
- 2. Turn the hose coupling (12a) clockwise until it fully engages.
- 3. Check that the suction hose (12) is installed correctly by gently pulling on the hose coupling (12a).

8.6. Uncoupling the suction hose (12) (Fig. 8, 9)

Uncouple the suction hose (12) from the suction connection (7) or the blast connection (10):

- 1. Turn the hose coupling (12a) counter-clockwise.
- 2. Pull the hose coupling (12a) out of the suction connection (10) or the blowing connection (7).

8.7. Storing the nozzles (15/16), telescopic pipe (14) and cable (Fig. 2, 10)

- 1. The nozzles (15/16) can be stored in the holders (2a) on the container lid (2).
- 2. The telescopic pipe (14) can be stored in the holders (4a) on the base frame (4).
- 3. You can store the cable on the holder on the blowing connection (10).

8.8. Attaching the telescopic pipe (14) (Fig. 11)

Note:

The telescopic tube allows you to adjust the product to suit your individual size.

- 1. Attach the telescopic pipe (14) to the handle (13).
- 2. To extend the telescopic tube (14), push the unlock button (14a) forwards and hold it in this position.
- 3. Adjust the telescopic tube (14) to the desired length and release the unlock button (14a) again.

8.9. Using the various nozzles (15/16) (Fig. 11)

Floor nozzle (15)

- Vacuuming of solid materials and liquids on medium to large surfaces, carpets or floor mats.
- Use the floor nozzle (15) in conjunction with the telescopic pipe (14).
- If required, it can also be used without the telescopic pipe (14).

Joint nozzle (16)

• Vacuuming of solid materials and liquids in joints, corners, radiators and hard-to-reach areas.

8.9.1. Fitting the nozzle (Fig. 11)

- 1. Insert the desired nozzle (15/16) into the handle (13) or the telescopic pipe (14).
- 2. Remove the nozzle (15/16) by pulling it forwards off the respective telescopic pipe (14) or off the handle (13).

9. Operation

The product is equipped with a stainless steel container. The castors allow the product to be highly manoeuvrable. With wet vacuuming, the suction air flow is switched off by a safety float valve when the container is full. The product also has a blowing function.

Please refer to the following descriptions for the function of the control elements.

ATTENTION

Always make sure the product is fully assembled before commissioning!

MARNING

Danger of injury!

Only insert the mains plug into the socket when the product is ready for use.

ATTENTION

Do not use without a filter!

9.1. Switching the product on/off (Fig. 12)

Switching on

- 1. Insert the mains plug into a properly fused mains socket.
- 2. Switch the product on by setting the on/off switch (9) to the "I" position.

Switching off

1. Switch the product off by setting the on/off switch (9) to the "0" position.

9.2. Switching the product and power tool on/off (Fig. 12) Switching on

- 1. Insert the mains plug into a properly fused mains socket.
- 2. Connect a power tool* to the product socket outlet (8).

- 3. Set the on/off switch (9) to position II.
- 4. When you switch on the power tool*, the automated process of switching on the product begins.

Switching off

- 1. Switch the power tool* off. The product has an automated switch-off function that activates after a delay of approximately 6 to 7 seconds.
- * = may not be included in the scope of delivery!

10. Working instructions

10.1. Suction function

MARNING

Vacuuming glowing ash as well as flammable, hazardous substances is prohibited. There is a danger of injury!

ATTENTION

Fine dusts, such as those from cement, soot and plaster, are too fine to be absorbed. There is a risk that it could get into the motor and damage it.

ATTENTION

Do not use without a filter!

- Place the product on a level, even surface.
- Do not suck up any hot, glowing, flammable, explosive or hazardous substances. These include hot ash, petrol, solvents, acids or alkalis. There is a risk of fire and injury.
- If the products heats up switch the product off and pull out the mains plug. Let the product cool down outdoors under supervision.
- Fill the container (3) no more than half way so that the safety float valve (11a) always remains free (Fig. 6).
- 1. Attach the hose coupling (12a) to the suction connection (7) (see 8.5.1.).
- 2. Switch on the product (see 9.1. or 9.2.).

10.1.1. Dry vacuuming (Fig. 5, 7, 8, 11)

Note:

Do not use a wet or damp product for dry vacuuming!

- 1. Insert the paper filter bag (17) into the container (3) (see 8.4.1.).
- 2. Fit the filter cartridge (19) (see 8.4.3.).
- 3. Connect the hose coupling (12a) to the suction connection (7) (see 8.5.1.).
- 4. Fit the telescopic pipe (14) to the handle (13) (see 8.8.).
 Connect the telescopic pipe (14) and one of the nozzles (15/16).
 Vacuuming at table height or in confined spaces:
 Proceed as described under 8.9.
- 5. Hold the suction pipe (12) handle (13) firmly.
- 6. Switch on the product (see 9.1. or 9.2.).
- 7. Vacuum the area to be cleaned or use it with a power tool*.
- 8. If necessary, adjust the suction power by sliding the slider (13a) on the handle (13) forwards and backwards.
- 9. Switch off the product (see 9.1. or 9.2.).
- * = may not be included in the scope of delivery!

10.1.2. Wet vacuuming (Fig. 6, 8, 11)

Note:

A float integrated in the filter basket ensures that the suction channel is automatically closed as soon as the container has reached its maximum capacity. In this case, the product must be switched off and the container emptied before operation can be continued.

- 1. Empty the container (3) before wet vacuuming (see 12.1.1.).
- 2. The container (3) is not suitable for storing liquids. Empty the container (3) after wet vacuuming (see *12.1.2.*).
- 3. Remove the paper filter bag (17) or the filter cartridge (19) from the tank (3) (see *8.4.1.* or *8.4.3.*).
- 4. Fit the foam filter (18) (see 8.4.2.).
- 5. Connect the hose coupling (12a) to the suction connection (7) (see 8.5.1.).
- Fit the telescopic pipe (14) to the handle (13) (see 8.8.).
 Connect the telescopic pipe (14) and one of the nozzles (15/16).
 Vacuuming at table height or in confined spaces:

Proceed as described in Described under *Using the various nozzles (15/16) (Fig. 11),* ▶ *Page 18.*

- 7. Hold the suction pipe (12) handle (13) firmly.
- 8. Switch on the product (see 9.1. or 9.2.).
- 9. Vacuum the area to be cleaned.
- 10. Switch off the product (see 9.1.).
- 11. Clean the product (see 12.1.).

10.2. Blast function

⚠ WARNING

Danger of injury!

If you direct the airflow at people, animals or objects, this can cause injury and damage.

- Direct the air flow away from you.
- Never direct the airflow at other people, animals or objects.
- Do not blow away hard objects such as stones or branches.
- 1. Insert the paper filter bag (17) into the container (3) (see 8.4.1.).
- 2. Fit the foam filter (18) or the filter cartridge (19) (see 8.4.2. or 8.4.3.).
- 3. Fit the hose coupling (12a) to the blowing connection (10) (see *8.5.2.*). Connect a nozzle (15/16) if required (see *8.9.1.*).
- 4. Hold the suction pipe (12) handle (13) firmly.
- 5. Switch on the product (see 9.1.).
- 6. Blow off a surface or objects.
- 7. Switch off the product (see 9.1.).
- 8. Connect the suction hose to the suction connection (7) (see 8.5.1.).

11. Electrical connection

The electrical motor installed is connected and ready for operation. The connection complies with the applicable VDE and DIN provisions. The customer's mains connection as well as the extension cable used must also comply with these regulations.

11.1. Damaged electrical connection cables

The insulation on electrical connection cables is often damaged.

This may have the following causes:

- Pressure points, where connection cables are passed through windows or doors,
- Kinks where the connection cable has been improperly fastened or routed,
- Places where the connection cables have been cut due to being driven over,
- Insulation damage due to being ripped out of the wall socket,
- Cracks due to the insulation ageing.

Such damaged electrical connection cables must not be used and are life-threatening due to the insulation damage.

Check the electrical connection cables for damage regularly. Ensure that the connection cables are disconnected from electrical power when checking for damage.

Electrical connection cables must comply with the applicable VDE and DIN provisions. Only use connection cables of the same designation.

The printing of the type designation on the connection cable is mandatory.

Safety information for replacing damaged or defective mains connection cables Connection type Y

If it is necessary to replace the mains connection cable, this must be done by the manufacturer or their representative to avoid safety hazards.

11.2. Important information

In the event of overloading, the motor will switch itself off. After a cool-down period (time varies) the motor can be switched back on again.

11.3. AC motor

Connections and repair work on the electrical equipment may only be carried out by electricians.

- The mains voltage must be 220 V 240V~.
- Extension cables up to 25 m long must have a cross-section of 1.5 mm².

12. Cleaning and maintenance

Have maintenance and repair tasks that are not described in this operating manual, carried out by a specialist workshop. Use only original spare parts.

There is a risk of accident! Always carry out maintenance and cleaning work with the motor switched off and the mains plug disconnected. There is a danger of injury! Let the Product cool down before all maintenance and cleaning tasks. Elements of the engine are hot. There is a danger of injury and burning!

The product can start unexpectedly and cause injuries.

- Switch off the motor before carrying out any cleaning or maintenance work.
- Allow the motor to cool down.
- Pull out the mains plug!

12.1. Cleaning

- 1. Never immerse the product in water or other liquids for cleaning.
- 2. Do not splash the product with water.
- 3. Keep protective devices, air vents and the motor housing as free of dust and dirt as possible. Rub the product clean with a clean cloth* or blow it off with compressed air* at low pressure. We recommend that you clean the product directly after every use.
- 4. Ventilation openings must always be free.
- 5. Do not use any cleaning products or solvents; they could attack the plastic parts of the product. Make sure that no water can penetrate the product interior.
- * = may not be included in the scope of delivery!

12.1.1. Emptying the container (3) (Fig. 3)

Empty and clean the product before and after use to avoid the accumulation of materials that could pose a fire risk in the product.

- 1. Remove the container cover (2) from the container (3) as described in Attaching and removing the container cover (2) (Fig. 2, 3).
- 2. Empty the container (3).

12.1.2. Empty container (3) after wet vacuuming (Fig. 1, 13)

- 1. Open the drain cover (6) when wet dirt is present so that the liquid sucked up can drain out.
- 2. Lift the product by the handle (1) and tilt it slightly to pour out any liquid residue from the container (3).
- 3. Put the drain cover (6) back on the drain hole. Close it by turning the drain cover (6) clockwise.
- 4. To ensure that the container (3) is empty, proceed as described in 12.1.1.

12.1.3. Cleaning the foam filter (18) and filter cartridge (19) (Figs. 3, 6, 7)

Clean the foam filter (18) or the filter cartridge (19) if the suction power decreases.

Note:

Before installing the filter again, make sure that it is dry.

- 1. Remove all nozzles (15/16) and the telescopic pipe (14) from the holder (2a/4a).
- 2. Remove the container cover (2) as described in Attaching and removing the container cover (2) (Fig. 2, 3).
- 3. Flip the container cover (2).
- 4. Pull the foam filter (18) or the filter cartridge (19) off the filter cage (11).
- 5. Remove the dust from the foam filter (18) or the filter cartridge (19) by shaking it out or washing it out if necessary.
- 6. Allow the foam filter (18) or the filter cartridge (19) to air dry before attaching and using it again.
- 7. Reattach the foam filter (18) or the filter cartridge (19) to the filter cage (11).
- 8. Close the container (3) with the container cover (2).

12.2. Maintenance

- 1. Check the product for obvious defects such as loose, worn or damaged parts before each use.
- 2. Check the covers and protective devices for damage and correct seating. Replace them if necessary.

12.2.1. Replacing the foam filter (18) and filter cartridge (19) (Figs. 3, 6, 7)

- 1. Remove all nozzles (15/16) and the telescopic pipe (14) from the holder (2a/4a).
- 2. Remove the container cover (2) as described in Attaching and removing the container cover (2) (Fig. 2, 3).
- 3. Flip the container cover (2).
- 4. Pull the foam filter (18) or the filter cartridge (19) off the filter basket (11) or remove the paper filter bag (17) from the fitting port (7a).
- 5. To replace the paper filter bag (17), proceed as described in 8.4.1.
- 6. Fit the new foam filter (18) to the filter cage (11) as described in 8.4.2..
- 7. Fit the new filter cartridge (19) to the filter cage (11) as described in 8.4.3.
- 8. Close the container (3) again with the container cover (2).

13. Storage and transport

13.1. Storage

• Clean and check the product for damage.

Store the product and its accessories in a dark, dry and frost-free place that is inaccessible to children.

The optimum storage temperature is between 5°C and 30°C.

Store the product in its original packaging.

Cover the product to protect it from dust or moisture. Store the operating manual with the product.

13.2. Transport

- 1. To transport the product, disconnect the it from the power supply and set it up in the new position you want to use it in.
- 2. The product may only be lifted or transported by the carrying handle.
- 3. Lift the product for transport over stairs or obstacles.
- 4. The product must be secured against tipping and slipping during transport in vehicles in order to prevent damage and injuries.

14. Repair & ordering spare parts

After repairs or maintenance, make sure that all safety-related parts are installed and are in perfect condition. All parts which may cause injury must be kept where they are inaccessible to children or others.

ATTENTION

According to the German Product Liability Act, no liability is accepted for damage caused by improper repairs or by not using original spare parts.

Such work should be performed by a customer service centre or an authorised specialists. The same applies to accessory parts.

Spare parts and accessories can be obtained from our Service Centre. To do this, scan the QR code on the front page.

Connections and repairs

Connections and repair work on the electrical equipment may only be carried out by electricians.

14.1. Ordering spare parts

Please provide the following information when ordering spare parts:

- Model designation
- Item number
- Type plate data

15. Troubleshooting

The following table shows fault symptoms and describes remedial measures in the event of your product failing to work properly. If you cannot localise and rectify the problem with this, please contact your service workshop.

Fault	Possible cause	Remedy
Product does not run.	Product switched off. On/ off switch switched off.	Switch the product on with the On/Off switch.
	Damaged mains connec- tion cable.	Switch the product off and dis- connect from the mains. Check for mains connection cable for damage.
		If necessary, have the mains con- nection cable replaced by an au- thorised specialist.
	On/off switch defective.	Please contact our service de-
	Motor defective.	partment.
	Faulty power supply.	Check the electrical system for compliance with the specifica- tions on the type plate.
Product works with in-	Internal loose contact.	Please contact our service de-
terruptions.	On/off switch defective.	partment.
	Container not closed.	Close the container.
	The container is full.	Empty the container.
	The airway is blocked.	Check the following parts for blockages and remove the block- ages:
		Container
		Vacuum hose
		Telescopic tube
	The filter cartridge or foam filter is clogged.	Clean the filter cartridge or foam filter.

Fault	Possible cause	Remedy
	The filter cartridge or foam filter is damaged.	Remove the filter cartridge or foam filter.
	The filter cartridge or foam filter is clogged.	Clean the filter cartridge or foam filter.
	The paper filter bag is full.	Replace the paper filter bag.
Dust escapes from the product.	The container cover has not been installed cor-rectly.	Attach the container cover cor- rectly.
Material sucked in is blown out again at the		Replace the foam filter or filter cartridge.
container cover.	There is no filter present.	Insert a filter.

16. Warranty Details



Wet / dry vacuum cleaner

Warranty Details

REGISTER YOUR PURCHASE AT www.aldi.com.au/en/about-aldi/product-registration/ TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION

The product is guaranteed to be free from defects in workmanship and parts for a period of 60 months (dependant on product) from the date of purchase. Defects that occur within this warranty period, under normal use and care, will be repaired, replaced or refunded at our discretion. The benefits conferred by this warranty are in addition to all rights and remedies in respect of the product that the consumer has under the Competition and Consumer Act 2010 and similar state and territory laws.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.



AFTER SALES SUPPORT

support@scheppach.com.au

17. Repair and Refurbished Goods or Parts Notice



Wet / dry vacuum cleaner

Repair and Refurbished Goods or Parts Notice

REGISTER YOUR PURCHASE AT www.aldi.com.au/en/about-aldi/product-registration/ TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION

Unfortunately, from time to time, faulty products are manufactured which need to be returned to the Supplier for repair.

Please be aware that if your product is capable of retaining user-generated data (such as files stored on a computer hard drive, telephone numbers stored on amobile telephone, songs stored on a portable media player, games saved on a games console or files stored on a USB memory stick) during the process of repair, some or all of your stored data may be lost.

We recommend you save this data elsewhere prior to sending the product for repair.

You should also be aware that rather than repairing goods, we may replace them with refurbished goods of the same type or use refurbished parts in the repair process.

Please be assured though, refurbished parts or replacements are only used where they meet ALDI's stringent quality specifications.

If at any time you feel your repair is being handled unsatisfactorily, you may escalate your complaint. Please telephone us on 1300 855 831 or write to us at:


RossMac Pty. Ltd. Unit 6, 4 Ovata Drive, Tullamarine, Victoria, 3043, Australia 1300 855 831 support@scheppach.com.au

Opening hours: Monday - Friday 8:00am-6:00pm



AFTER SALES SUPPORT
a 1300 855 831

📥 support@scheppach.com.au

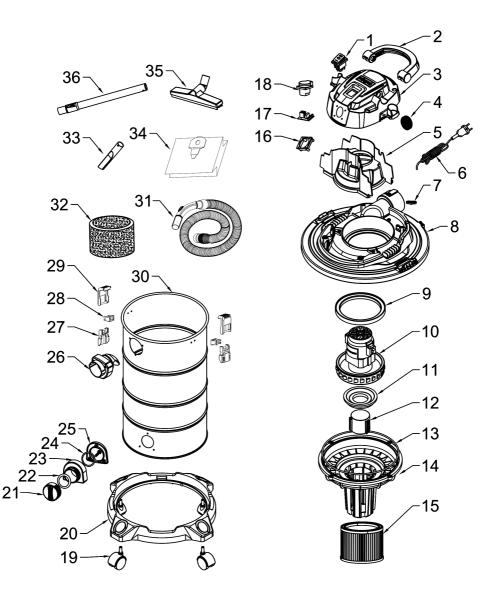

Notes